



Harkness Screens UK
 Tel +44 (0) 1438 725200
 Fax +44 (0) 1438 344400

E-Mail sales@harkness-screens.com
www.harkness-screens.com

Harkness Screens USA
 Tel +1 (540) 370 1590
 Fax +1 (540) 370 1592

MATT WHITE EVENT SCREENS

DATA SHEET

Document Ref DS-051 Issue 6 Feb 2008

Matt White event screens are flexible PVC front projection surfaces available as made up screens or off roll. Made up screens have no visible seams under normal projection conditions and viewing distances.

Applications

For use in 'cinema' projection conditions.
 The matt white with black reverse surface is particularly suitable where there is ambient light behind the screen.
 Surfaces can be:

- laced into frames
- used with motorised and manual roller screens
- stapled onto wooden frames
- fastened with press studs (snaps) to fixed or folding frames


If perforated screens are required (for sound transmission) use Harkness Matt Plus surfaces.

Matt White

Available 2.2m wide off roll
 Gain 1.0
 Weight 0.43 kg/m² (0.09 lb/ft²)
 Also available in 3m width; UK fire certificate only.

Fire Retardancy

Certification to the following standards:
 UK
 France M1

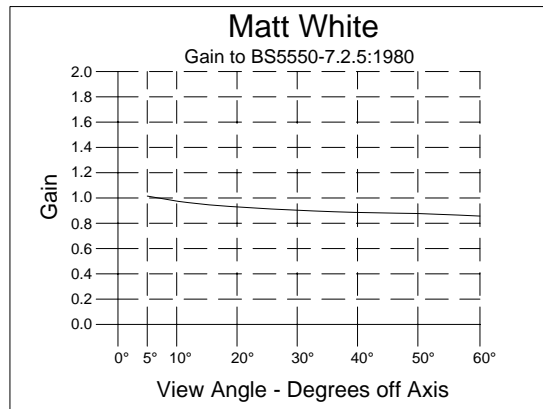

White/Black Reverse

Available 2.0m wide off roll
 Gain 1.0
 Weight 0.43 kg/m² (0.09 lb/ft²)

Fire Retardancy

Certification to the following standards:
 UK
 France M1

Sizes and Shapes

- Rectangular or special shape screens can be made.
- Screens bigger than 100ft x 65ft (30m x 20m) are subject to special enquiry.
- Materials are also available off roll.

Edge Finishing

The following edge finishes are available as standard:

- Web and eye (grommet) with 6" (150mm) spacing.
- Preformed pipe pocket.
- Cut square (unfinished).

A combination of these edge finishings is possible on the same screen.

Typical Packing

Matt White event screens can be folded and will be supplied as a parcel in sizes up to 90m² (1000ft²)
 A wooden crate will be used for larger sizes. Surfaces for roller screens will be packed in a tube.

Despatch/Storage

These screens can be stored folded for up to one month; longer than this is not recommended.
 Screens can be stored for longer periods if tube packed (unfolded).
 Screens should normally be transported and stored at temperatures between 40/85°F (5/30°C)-with relative humidity less than 80%.
 If screens are very cold (e.g. following air transport) then they must be allowed to warm up before unpacking and installation, otherwise cold cracking may occur.

Installation

The following principles should be followed when installing Harkness event screens:

- The environment should be clean with no building works taking place.
- Installation should be at ambient temperature 68/75°F (20/24°C).
- Care should be taken to avoid the screen coming into contact with sharp objects during installation.
- Excessive loads should not be placed on any specific point of the screen.
- Use of cotton gloves is recommended.
- The viewing surface should not be touched.
- Creasing should be minimised during installation.

The securing of the screen will depend on the edge treatment specified:

- Screens with web and eyes (grommets) can be secured using sisal or screen ties (bungees)
- Unfinished screens can be secured using Harkness 'Hold-On' clips and ties.

Care and Maintenance

The general environment where the screen is installed should be kept reasonably clean to avoid dirt and dust build-up. Screens can be periodically cleaned using a soft brush or cloth, doing this vertically with limited pressure. Under no circumstances should the screens be made wet or cleaned with any material containing bleach or other chemicals.

In the interest of product enhancement, Harkness Screens reserves the right to introduce modifications or alterations without notice