



**Harkness Screens UK**  
 Tel +44 (0) 1438 725200  
 Fax +44 (0) 1438 344400

E-Mail [sales@harkness-screens.com](mailto:sales@harkness-screens.com)  
[www.harkness-screens.com](http://www.harkness-screens.com)

**Harkness Screens USA**  
 Tel +1 (540) 370 1590  
 Fax +1 (540) 370 1592

**PERLUX 140+ MPS  
 FRONT PROJECTION SCREEN  
 DATA SHEET**

**Document Ref DS-079 Issue 3 July 2008**



Perluxe 140+ MPS front projection screens build on the leading technology of Harkness Screens. The surface has smaller diameter perforations (less than half of standard perforation) but a very high density of holes to provide the ultimate surface for close viewing conditions, coupled with excellent acoustic performance. MPS can be used in digital cinema where large perforations can interfere with pixel generated images. The screens are seamless.

**Application**

Perluxe 140+ MPS screens are recommended for a wide range of applications where optimum acoustic performance is required including:

- Preview Theatre • Digital Cinema • Screening Room • Home Theatre • Roller Screen

Surfaces suitable for use in flat or curved frames and roller screens.

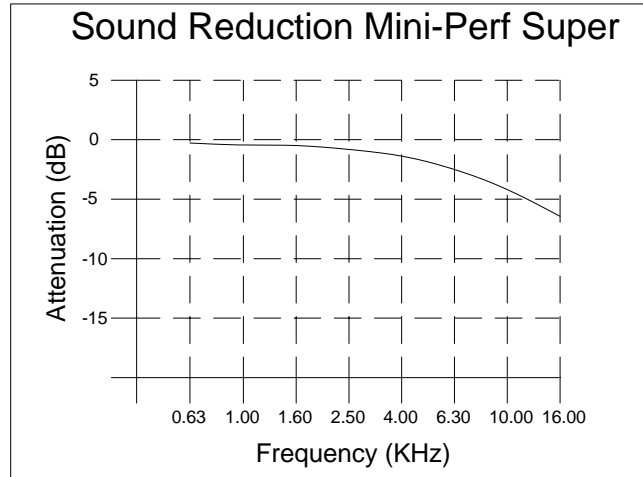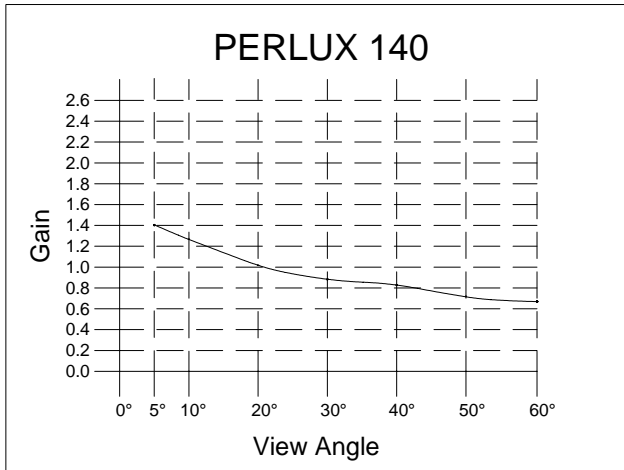

**General Detail**

View Distance	Minimum of 1.5m (5')
Maximum Size	5.2m x 2.2m (17' x 7' 2")
Perforation Size	∅0.50mm (0.020")
Perforation Density	5.1%
Weight	0.50kg/m <sup>2</sup> (0.10lb/ft <sup>2</sup> )
Eyelet Spacing	150mm (6") nominal

**Typical Packing**

Rolled in a cardboard tube.

**Surface Edging Options**

- Web and eye (grommet). Triple fold web integral with surface
- Preformed pipe pocket any size on any side
- Cloth web and fixings (snaps) for press stud frames
- Straight sides or shaped to special order
- Cut square (unfinished edge)

**Fire Retardancy** Certification to the following standards:

- UK BS 5867 Part 2
- USA NFPA 701
- Germany B1
- Spain M1
- Italy Class 1
- Japan BT-08-050 (*regulation requires certification by importing company*)
- Korea (*regulation requires certification by importing company*)
- Australia

**Despatch/Storage**

Screens should normally be transported and stored at temperatures between 5°C and 30°C (40°F and 85°F), with relative humidity less than 80%.

If screens are very cold (e.g. following air transport) then they must be allowed to warm up before unpacking, otherwise cold cracking may occur. Screens should be installed within a maximum of 2 months of shipping. Packages should be handled with care to avoid damage.

**Installation**

The following principles should be followed when installing Harkness Perluxe 140+ MPS screen surfaces:

- The auditorium should be clean with no building works taking place. • Installation should be at ambient temperature (20/24°C-68/75°F). • Care should be taken to avoid the screen coming into contact with sharp objects during installation. • Excessive loads should not be placed on any specific point of the screen. • Use of cotton gloves is recommended.
- The viewing surface should not be touched (the rear of the screen is identified by the product label). • The surface should not be creased during installation.

**Care and Maintenance**

The general environment where the screen is installed should be kept reasonably clean to avoid dirt and dust build-up. Screens can be periodically cleaned using a soft brush or cloth, doing this vertically with limited pressure. Under no circumstances should the screens be made wet or cleaned with any material containing bleach or other chemicals.